

Money's in the air

The forces of nature are far beyond human control, however, some of them we are able to control and transform into energy. From natural sources we derive, among other things, lighting and heating, and those are the factors which keep the whole economy working.

In some states water power forms the basis for natural energy. In other states, like California for instance, wind power is the natural energy source.

Actually, the California wind means that millions of kilowatt hours are floating about in the air, so really, it is only a question of harnessing them.

The advanced Wind Matic windmill renders this possible through an investment which is not only financially profitable, but also an extremely solid way to save energy money. In areas which are particularly wind-swept it would be almost unwise not to utilize the wind energy.

Wind Matic WM 15 S means a safe investment in the future

Here are some facts which speak for investing in windmills

Wind power: The investment. It would be an understatement to say that wind power represents a favorable investment opportunity. In fact, thanks to several factors, wind power is one of the most attractive investment opportunities ever offered to the private investor.

Wind power is »pre-sold«. Federal and state law require utility companies to purchase all the power that wind generation can produce. That means that every single watt of wind-produced electricity is guaranteed a market! Better still, the utility companies are required to purchase wind-generated power at the »highest avoided cost« – that is, the maximum rate they would have to pay for conventionally-produced power.

Here are some facts which speak for investing in Wind Matic

Wind Matic A/S has more than 10 years experience in development and production of windmills and is the Danish company which has the best knowledge in this field. The Wind Matic windmill occupies a prominent position because of

the advanced technology and design of the windmill and because the components used are of high quality. All factors which ensure a reliable, effective operation and a very long life, including very little maintenance.

Win 158 is the result of many years of research and development


The Wind Matic 15 S has been developed on the basis of the WM 14 S.

The Wind Matic 15 S was the first improvement in our S series, constructed with the purpose of improving power output. The WM 15 S is equipped with advanced computer steering, based on micro-processor technology.


The annual energy yield of the windmill is dependent on the wind conditions of the site in question and of course the plac-

ing of the windmill.

The power of the WM 15 S can be read from the power curve below. (Power Curve measured by an impartial authority »Test Plant for Smaller Windmills, Riso«).




Power Curve WM 15 S USA

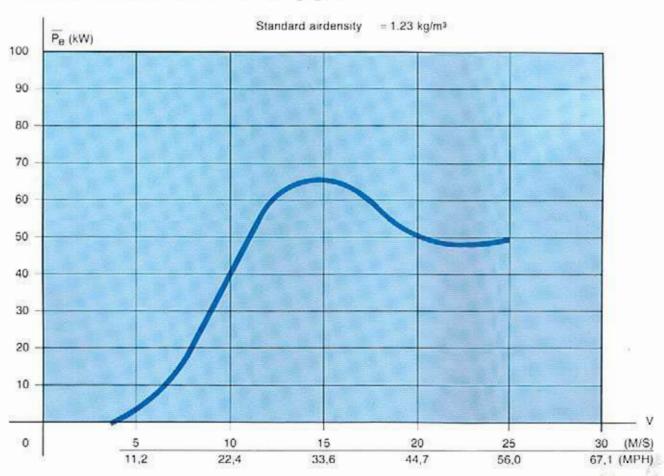





- The turbine has been constructed in a way which provides you with the possibility of fine adjustment of the tip angle in accordance with the conditions. The turbine is mounted on a forged shaft, supported by two heavy-duty, spherical roller bearings.
- 2) When designing the aerofoil emphasis was placed on obtaining a higher power output. The blades are made of fiberglass reinforced Polyester, built up around a reinforced main beam with an imbedded root of heat-treated SG-iron.
- Each blade is equipped with a spoiler type independent aerodynamic brake, providing a secondary braking system.

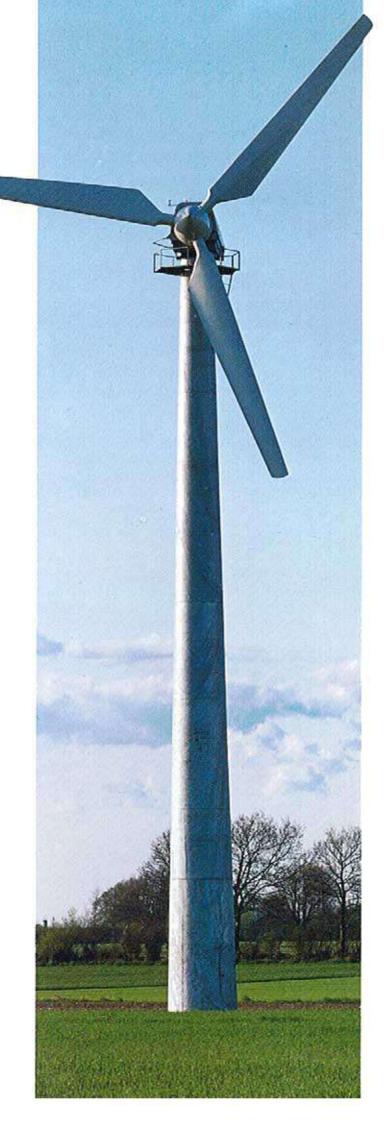

Sturdy quality down to details



Between the gearbox and the generator a flexible coupling, free of maintenance, is mounted.

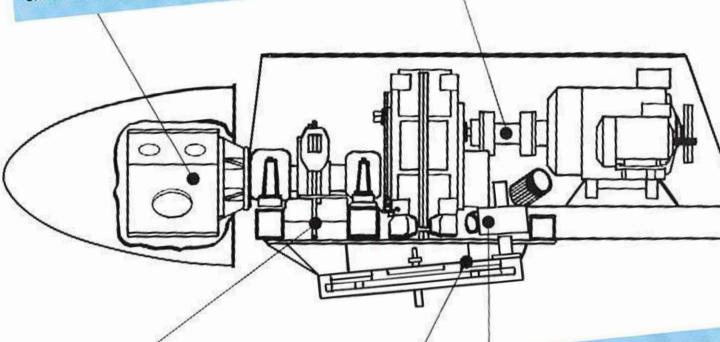

The windmill is equipped with an operation brake on the slowrevolving shaft. A fact which means that the gearbox will not be exposed to large mechanical loads when breaking.

The yawing system functions by means of a yaw motor and a yaw gear which keeps the windmill oriented to the wind direction.

The yaw motor is controlled by means of wind vane signals.


The nacelle rotates on four selfgreasing Oilon blocks, mounted between the cabin and the yaw gear wheel.

WM 158 has built-in electronic supervision, providing maximum security

The control system of the WM 15 S is based on advanced microprocessor technology.

The system supervises and controls both the grid and the windmill and will bring the windmill to an immediate halt if any irregularity should arise:

- 1. Abnormal variations in grid frequency and grid voltage.
- 2. Overspeed on main and/or generator
- Transmission error between large and small generator.
- 4. Breaking of phase between large and small generator.
- 5. Thermal overload of generators (temperatures measured on two levels).
- 6. Thermal overload of yaw motor.
- 7. Thermal overload of gearbox.
- 8. Abnormal vibrations.
- 9. Max. yawing period exceeded.
- 10. Level too low in brake fluid reservoir.
- 11. Oil level too low in gearbox.
- 12. Worn brake blocks.
- Abnormal twisting of cables (automatic un-twisting).



14. Wind speed higher than cut-out speed.

When the points stated in 13 and 14 are corrected, the computer control will re-start the windmill automatically. Thyristor control from the computer ensures a careful, soft connection to the grid.

A display on the control panel indicates any irregularity by the windmill operation or by the grid. Also, other factors such as wind speed, electric power, and the RPM. will appear from the display. This control system also gives you the possibility of connecting a computer for central supervision.

Technical specifications WM 15 S

Shell material Aerofoil

Pitch Length

480 60	٠.	

3.5 m/s 15 m/s 25 m/s 50 m/s 66 kW

3 blades, stall regulated up wind turbine 15.5 m counterclockwise 40-41/57-58 RPM

1180 kg

selfsupported reinforced fiberglass Polyester with steel root reinforced fiberglass Polyester NACA 63-200 fixed 7.45 m

AERODYNAMIC BRAKES Realeasing NACELLE Cover material Chassis material

Dimensions (length × width × height)

Mass (excl. turbine) MAIN BEARINGS Type

Number OPERATION BRAKE Type Location Operation GEARBOX

Number of stages Gear ratio Rated power COUPLING Type

GENERATORS Type

Type

spoilers centrifugally

aluminium hot dip galvanized

2690 × 1325 × 1320 mm 3990 kg

spherical roller bearings

disc brake turbine shaft hydraulic

oil lubricated, hollow shaft 1:20.83 130 kW (DIN)

flexible rubber coupling

asynchronous with squirrel cage Small generator Rated electrical power

Rated RPM Large generator Rated electrical power Rated RPM

1212 RPM CONNECTION BETWEEN LARGE AND SMALL **GENERATOR**

Type

Gear ratio YAWING SYSTEM

Operation

Yawing period CONTROL SYSTEM Type

Function

V-belt transmission 1:1.42

13 kW

66 kW

1230 RPM

yaw gear wheel with external teeth and oilon bearings on/off electrical control of yawing motor from wind vane signals 0.8°/sec.

electrical, based on micro-processors control, super-

vising, connection of generators b.m.o. thyristors





Six various types of towers


You can choose between a steel lattice tower or a tube tower and each of these types gives you the choice between three different heights – 60, 72 or 80 ft.


Which height of tower chosen depends on the conditions of the site in question.


The steel lattice tower is solidly constructed of hot dip galvanized round iron and the tube tower is hot dip galvanized milled tank plates.














There is always a Wind Matic windmill which fits

Irrespective of energy needs there is always a Wind Matic windmill which fits – and remember, the Wind Matic windmills are all fully developed products from the professional Danish Windmill Company.

- You can depend on the Wind Matic windmill.